

LIUGONG **9018FE** **ELEKTRIČNI BAGER**

TIP MOTORA
BATERIJA
NAZIVNI KAPACITET BATERIJE
NAZIVNA SNAGA MOTORA
STANDARDNI KAPACITET ŽLICE
RADNA MASA

IPMSM
LFP
20.6 kWh
17 kW
0.045 m³
2,060 kg



B A T T E R Y E L E C T R I C V E H I C L E

TEŽAK SVIJET. TEŠKA OPREMA.

9018FE SPECIFIKACIJE >>>

PARAMETRI PERFORMANSI

Radna masa	2.060 kg
Standardni kapacitet žlice s vrhom (Referentni)	0.045 m³
Maksimalna brzina kretanja	4.5 km/h
Brzina zakretanja	9.5 rpm
Vučna sila na kuki	16 kN
Sila kidanja na žlici (ISO)	16 kN
Sila otkidanja na ruci (ISO)	9 kN

ELEKTRIČNI SUSTAV


Tip motora	IPMSM
Baterija	LFP
Nazivni kapacitet baterije	20.6 kWh
Nazivni napon	44.8V
Vrijeme punjenja (pri snazi punjenja od 20 kW)	≤ 90 min
Priključak za punjenje	DC punjenje

PODVOZJE

Broj papuča sa svake strane	37
Broj donjih rolera sa svake strane	3

DIMENZIJE

A Transportna duljina	3,707 mm
B Transportna visina	2,350 mm
C Razmak gusjenica	750/1,060 mm
D Širina podvozja	980/1,290 mm
E Duljina do središta rolica	1,230 mm
F Duljina gusjenice	1,580 mm
G Ukupna širina gornje strukture	980 mm
H Polumjer zakretanja stražnjeg dijela	1,070 mm
I Udaljenost protuutega od tla	435 mm
J Ukupna visina kabine	1,635/1,670 mm
K Min. udaljenost od tla	100 mm

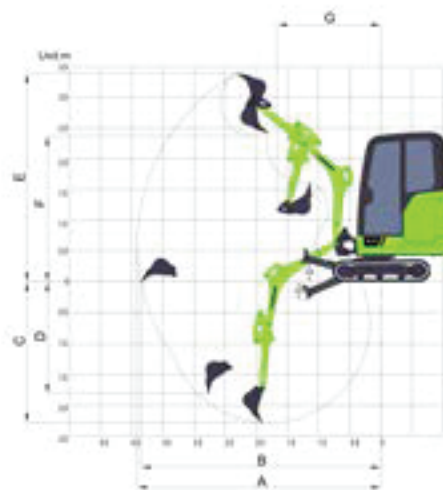

RADNI OPSEG

Duljina stijeke	1,685 mm
Duljina utovarne ruke	1,070 mm
A Maks. dohvat kopanja	3,910 mm
B Maks. dohvat kopanja na tlu	3,850 mm
C Maks. dubina kopanja	2,290 mm
D Maks. vertikalna dubina kopanja zida	1,820 mm
E Maks. visina kopanja	3,385 mm
F Maks. visina istovara	2,370 mm
G Min. prednji polumjer zakretanja	1,660 mm

HIDRAULIČKI SUSTAV

Ukupni protok glavnih crpki	55 L/min
Glavni sigurnosni tlak	21 MPa

SERVISNI KAPACITETI

Spremnik za hidrauličko ulje	24L
Ukupna zapremina hidrauličkog sustava	29L



Guangxi Liugong Machinery Co., Ltd.

No. 1 Liutai Road, Liuzhou, Guangxi 545007, PR China

T: +86 772 3886124

E: overseas@liugong.com

www.liugong.com

Specifications and designs are subject to change without notice. Machines shown may include optional equipment. Liugong standard and optional equipment may vary from region to region. Please consult your Liugong dealer for information specific to your area.

02/2025 Dizajniran od strane Liugong
Mijenja prethodnu verziju od 02/2025