



Motor

Nominalna snaga

Maks. neto snaga

Radna masa

Maks. dubina kopanja

Standardni kapacitet žlice

Cummins L9

231 kW (310 hp) @ 2.100 rpm

219 kW (294 hp) @ 2.100 rpm

38.800 kg

7.340 mm

1,8 m³

936F BAGER

936F SPECIFIKACIJE >>>

MOTOR

Emisiji ispušnih plinova	Tier 4F / Stage V
Proizvođač	Cummins
Model	L9
Nazivna snaga	231 kW (310 hp / 314 ps) @ 2.100 rpm
Maks. neto snaga	219 kW (294 hp / 298 ps) @ 2.100 rpm
Maks. zakretni moment	1.526 N·m @ 1,400 rpm
Broj cilindara	6
Radni obujam	8,9 L

DONJE POSTOLJE

Širina papuče	600 mm
Broj papuča po strani	49
Broj gornjih rolara po strani	2
Broj donjih rolara po strani	9

POGON GUSJENICA


Maksimalna brzina kretanja	5.5 km/h
Vučna sila	320 kN

HIDRAULIČKI SUSTAV


Ukupni protok glavnih crpki	2×351 L/min
Tlak rasterećenja, glavni	34,3 MPa
Tlak rasterećenja, s pojačanjem	37,3 MPa

DIMENZIJE

A. Transportna duljine	11.300 mm
B. Transportna visina	3.800 mm
C. Razmak gusjenica	2.590 mm
D. Transportna širina	3.190 mm
E. Duljina gusjenica	5.075 mm
F. Razmak između osi krajnjih kotača	4.140 mm
G. Ukupna širina gornjeg postroja	3.163 mm
H. Polumjer okretanja stražnjeg dijela	3.593 mm
I. Odstojanje protuutega od tla	1.250 mm
J. Visina kabine	3.175 mm
K. Minimalno odstojanje od tla	545 mm

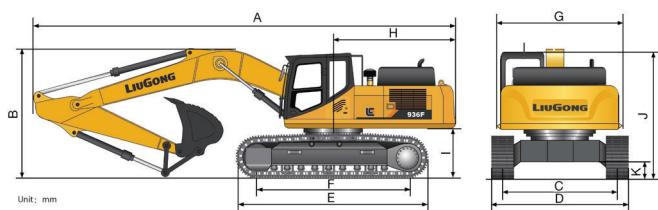

Jedinica mjere: mm

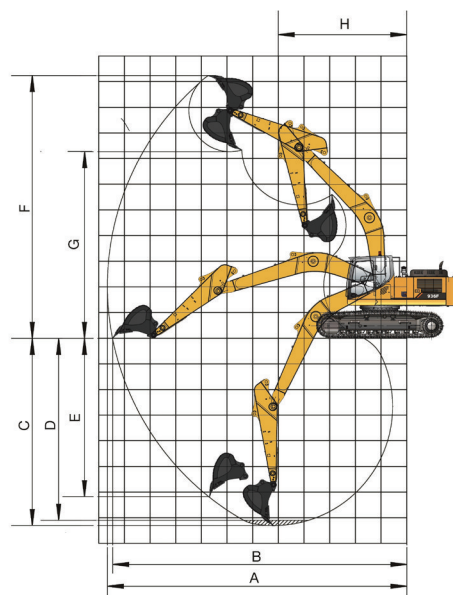

STRIJELA I RUKA

Duljina strijele	6.400 mm
Duljina ruke	3.200 mm

PERFORMANSE ŽLICE

Stand. kapacitet nasute žlice (Referentni)	1,8 m³
--	--------

SERVISNI KAPACITETI

Spremnik za gorivo	620 L
Motorno ulje	30 L
Sustav za hlađenje	37 L
Spremnik hidrauličkog ulja	240 L
Ukupno u hidrauličkom sustavu	450 L

SUSTAV ZAKRETANJA

Brzina zakretanja	10 rpm
-------------------	--------

RADNI OPSEG

A. Maks. doseg kopanja	11.100 mm
B. Maks. doseg kopanja na tlu	10.900 mm
C. Maks. dubina kopanja	7.340 mm
D. Maks. dubina kopanja, nivo od 2,5 m	7.180 mm
E. Maks. dubina kopanja vertikalnog zida	6.460 mm
F. Maks. visina rezanja	10.240 mm
G. Maks. visina istovara	7.160 mm
Sila iskopa žlice (ISO)	290 kN
Sila prodora ruke (ISO)	196 kN

Guangxi Liugong Machinery Co., Ltd.

No. 1 Liutai Road, Liuzhou, Guangxi 545007, PR China
T: +86 772 3886124 E: overseas@liugong.com
www.liugong.com

Specifications and designs are subject to change without notice. Machines shown may include optional equipment. Liugong standard and optional equipment may vary from region to region. Please consult your Liugong dealer for information specific to your area. Engine power kW is converted to metric hp in this file (1 kW=1.34 hp).

10/2024 Designed by Liugong
Replace the previous versions of 01/2023