



Motor
Nazivna snaga
Neto snaga
Maks. obrtni momenat
Kapacitet noža
Operativna težina

Cummins QSK19
455 kW (610 hp) @ 2.000 rpm
421 kW (565 hp) @ 2.000 rpm
2.696 N·m
19,2 m³
70.800 kg

LD60D BULDOZER

LD60D SPECIFIKACIJE >>>

ENGINE

Emisije izduvnih gasova	Tier 3 / Stage III
Proizvođač	Cummins
Model	QSK19
Nazivna snaga	455 kW (610 hp / 619 ps) @ 2,000 rpm
Neto snaga	421 kW (565 hp / 572 ps) @ 2,000 rpm
Maks. obrtni momenat	2,696 N·m
Broj cilindara	6
Usisavanje	Turbo-punjeni sa međuhladnjakom
Zapremina	19 L

TRANSMISIJA


Tip transmisije	Power shift
Maks. brzina kretanja naprijed, spora/brza	9.4/12.0 km/h
Maks. brzina kretanja nazad, spora/brza	11.7/14.9 km/h
Broj stepeni prenosa, naprijed	3
Broj stepeni prenosa, nazad	3
Tip upravljanja	Dvostepeno upravljanje

ELEKTRIČNI SISTEM

Napon sistema	24 V
Kapacitet akumulatora	120 Amp-hr
Struja hladnog starta akumulatora	1.000 Amp-hr

DONJI STROJ

Tip gusenice	Sa jednim rebrom, zaptivena i podmazana
Širina papuče	610 mm
Broj papuča (po strani)	39
Broj gornjih rolni (po strani)	2
Broj donjih rolni (po strani)	7
Pritisak na tlo	139 kPa
Visina rebra papuče	93 mm

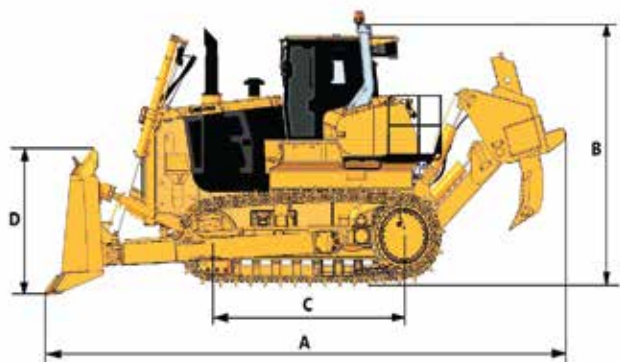

OPERATIVNA TEŽINA

Operativna težina	70,800 kg
-------------------	-----------

PERFORMANSE NOŽA

Tip noža	Semi-U
Kapacitet noža	19,2 m³
Dubina ukopavanja noža	830 mm
Visina podizanja noža	1.530 mm
Maksimalni nagib noža	1.150 mm

PERFORMANSE RIPERA


Tip ripera	Jednokraki ripper
Maks. rastojanje ispod vrha zuba	1.000 mm
Dubina ukopavanja ripera	1.670 mm

KAPACITETI REZERVOARA I TEČNOSTI

Rezervoar za gorivo	1,350 L
Motorno ulje	59,3 L
Sistem za hlađenje	54 L
Rezervoar hidrauličnog ulja	270 L
Transmisija	340 L
Završni pogoni (bočni reduktori, po strani)	85 L

DIMENZIJE

A Ukupna dužina	10.410 mm
B Visina do vrha ROPS zaštitne strukture	4.545 mm
C Dužina dodira gusenice sa tlog	3.610 mm
D Visina noža	2.230 mm
E Širina noža	4.778 mm
F Širina traga gusenica	2.500 mm
G Širina preko gusenica	3.110 mm

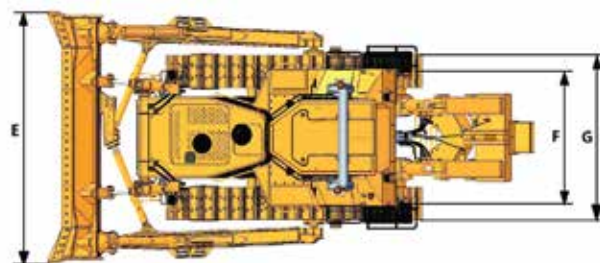

Guangxi Liugong Machinery Co., Ltd.

No. 1 Liutai Road, Liuzhou, Guangxi 545007, PR China
T: +86 772 3886124 E: overseas@liugong.com
www.liugong.com

Specifications and designs are subject to change without notice. Machines shown may include optional equipment. Liugong standard and optional equipment may vary from region to region. Please consult your Liugong dealer for information specific to your area. Engine power kW is converted to horsepower (1 kW=1.3596 ps and 1 kW=1.3410 hp) in this file.

03/2026 Designed by LiuGong
Replace the previous versions of 12/2025